


Magnetic Drive Pump, Type ASV-MAX

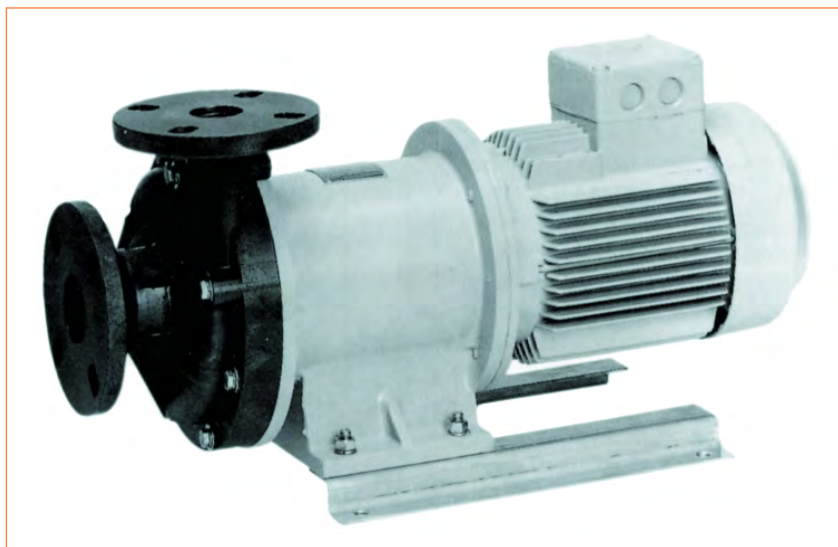

- ✓ High reliability
- ✓ Dry running safe
- ✓ Pump body made from reinforced material
- ✓ Flow capacity up to 50 m³/hr
- ✓ Head up to 35m
- ✓ Media density up to 1.9kg/dm³

Magnetic drive pumps of type ASV-MAX with dry running capacity allow safe use in irregular conditions.

- ASV-MAX pumps are hermetically enclosed and emission-free, thus ideal for environmental protection when handling dangerous liquids.
- New developed slide bearings are suitable to cover the friction heat during short dry running periods.
- Inner magnet covered by plastic is one part together with the impeller.
- All parts of the ASV-MAX, which are in contact with the liquid to be handled as well as the body of high quality PP^{GF} and ECTFE^{CF}, slide bearings of HD-Carbon and SiC.

